arXiv:1302.6289v1 [math.OC] 26 Feb 2013

An Input-Output Construction of Finite State ρ/μ Approximations for Control Design

Danielle C. Tarraf*

Abstract

We consider discrete-time plants that interact with their controllers via fixed discrete alphabet sets in the absence of exogenous inputs. For this class of systems, we propose a general procedure for constructing a sequence of finite state approximate models starting from finite length sequences of input and output signal pairs. We show that the proposed construction satisfies desirable properties of ρ/μ approximations, thus leading to nominal deterministic finite state machine models that can be used in certified-by-design controller synthesis. We also show that the proposed construction satisfies a relevant 'completeness' property, and we conclude with directions for future work.

1 Introduction

1.1 Motivation

Cyber-physical systems, involving tightly integrated physical and computational components, are omnipresent in modern engineered systems [10]. These systems are fundamentally complex, and pose multiple challenges to the control engineer. In order to effectively address these challenges, there is an inevitable need to move to abstractions or model reduction schemes that can handle dynamics and computation in a unified framework. Ideally, an abstraction or model complexity reduction approach should provide a lower complexity model that is more easily amenable to analysis, synthesis and optimization, as well as a rigorously quantifiable assessment of the quality of approximation. This would allow one to certify the performance of a controller designed for the lower complexity model and implemented in the actual system faithfully captured by the original model, without the need for extensive simulation or testing.

The problem of approximating systems involving dynamics and computation (cyber-physical systems) or discrete and analog effects (hybrid systems) by simpler systems has been receiving much attention over the past two decades [1,34]. In particular, the problem of constructing *finite* state approximations of hybrid systems has been the object of intense study, due to the rampant use of finite state machines as models of computation or software, as well as their amenability to tractable analysis [29] and control synthesis [9,14] (though tractable does not always mean computationally efficient!) .

1.2 Overview of the Contribution

In a previous effort [28], we proposed a notion of finite state approximation for 'systems over finite alphabets', basically plants that are constrained to interact with their feedback controllers by sending and receiving signals taking values in fixed, finite alphabet sets. We refer to this notion of approximation as a 'ρ/μ approximation', to highlight the fact that is is compatible with the analysis [32] and synthesis [33] tools we had previously developed for systems whose properties and/or performance objectives are described in terms of ρ/μ gain conditions. Note that the proposed notion of ρ/μ approximation explicitly identified those properties that the approximate model needs to satisfy in order to enable certified-by-design controller synthesis. However, it did not restrict us to a particular constructive algorithm.

In this paper, we propose and analyze a new constructive procedure for generating ρ/μ approximations of a given plant and performance objective. In contrast to the state-space based construction presented as a

---

[*] The author is with the Department of Electrical & Computer Engineering Department at the Johns Hopkins University, Baltimore, MD, 21218 (dtarraf@jhu.edu). Preliminary versions of this work were presented in [26,27].

simple illustrative example in [28], which was specifically tailored to the dynamics in question, the present construction is widely applicable to arbitrary plants over finite alphabets provided that: (i) They are not subject to exogenous inputs, and (ii) their outputs are a function of the state only (i.e. analogous to strictly proper transfer functions in the LTI setting).

Our proposed construction essentially associates states of the approximate model with finite length subsequences of input-output pairs of the plant. Since the underlying alphabets are finite, the set of possible input-output pairs of a given length is also finite. The resulting approximate models thus have finite state-space, and are shown to satisfy desirable properties of ρ/μ approximations, rendering them useable for control synthesis.

1.3 Related Work

Automata and finite state models have been previously employed as abstractions or approximate models of more complex dynamics for the purpose of control design: We survey the directions most relevant to our work in what follows.

One research direction makes use of non-deterministic finite state automata constructed so that their input/output behavior contains that of the original model (these approximations are sometimes referred to as 'qualitative models') [12, 13, 20]. Controller synthesis can then be formulated as a supervisory control problem, addressed using the Ramadge-Wonham framework [21, 22]. More recently, progress has been made in reframing these results [16, 17] in the context of Willems' behavioral theory and l-complete systems [35]. Our construction bears some resemblance to algorithms employed in constructing qualitative models. However, our notion of ρ/μ approximation is fundamentally different from the notion of qualitative models, as it seeks to explicitly quantify the approximation error in the spirit of robust control.

A second research direction, influenced by the theory of bisimulation in concurrent processes [15, 18], makes use of bisimulation and simulation abstractions of the original plant. These approaches, which typically address full state feedback problems, effectively ensure that the set of state trajectories of the original model is exactly matched by (bisimulation), contained in (simulation), matched to within some distance ϵ by (approximate bisimulation), or contained to within some distance ϵ in (approximate simulation), the set of state trajectories of the finite state abstraction [7, 19, 23, 25]. The performance objectives are typically formulated as constraints on the state trajectories of the original hybrid system, and controller synthesis is a two step procedure: A finite state supervisory controller is first designed, and subsequently refined to yield a certified hybrid controller for the original plant [24].

Other related research directions make use of symbolic models [2, 8] , approximating automata [3, 5], and finite quotients of the system [4, 36].

Of course, the idea of using finite length sequences of inputs and outputs is widely employed in system identification [11]. However, the setup of interest to us is fundamentally different for three reasons: First, the dynamics of the plant are exactly known. Second, the data is complete (or can be completely generated). Third, the data is exact and uncorrupted by noise.

Finally, the presently proposed construction differs from our preliminary efforts reported in [30], as it approximates the performance objectives as well as the dynamics of the systems, and moreover leads to a finite state nominal model with *deterministic* transitions.

1.4 Organization and Notation

We begin in Section 2 by reviewing the relevant notion of ρ/μ approximation as well as basic concepts that will be useful in our development, We state the problem of interest in Section 3. We revisit a special structure in Section 4: We demonstrate its relevance to ρ/μ approximations, and we address the related question of disturbance alphabet choice. We propose a constructive procedure in Section 5, and we show that the resulting approximate models satisfy the desired properties of ρ/μ approximation in Section 6. We demonstrate further relevant properties in Section 7, highlighting the completeness of this construction. We conclude with directions for future work in Section 8.

We employ fairly standard notation: $\mathbb{Z}_+$, $\mathbb{R}_+$ denote the non-negative integers and non-negative reals, respectively. Given a set $\mathcal{A}$, $\mathcal{A}^{\mathbb{Z}_+}$ and $2^{\mathcal{A}}$ denote the set of all infinite sequences over $\mathcal{A}$ (indexed by $\mathbb{Z}_+$) and the power set of $\mathcal{A}$, respectively. The cardinality of a (finite) set $\mathcal{A}$ is denoted by $|\mathcal{A}|$. Elements of $\mathcal{A}$ and

$\mathcal{A}^{\mathbb{Z}_+}$ are denoted by a and (boldface) $\mathbf{a}$, respectively. For $\mathbf{a} \in \mathcal{A}^{\mathbb{Z}_+}$, $a(i)$ denotes its i^{th} term. For $f : A \to B$, $C \subset B$, $f^{-1}(C) = \{a \in A | f(a) \in C\}$. Given $P \subset (\mathcal{U} \times \mathcal{R})^{\mathbb{Z}_+} \times (\mathcal{Y} \times \mathcal{V})^{\mathbb{Z}_+}$ and a choice $\mathbf{u_o} \in \mathcal{U}^{\mathbb{Z}_+}$, $\mathbf{y_o} \in \mathcal{Y}^{\mathbb{Z}_+}$, $P|_{\mathbf{u_o},\mathbf{y_o}}$ denotes the subset of P defined as $P|_{\mathbf{u_o},\mathbf{y_o}} = \Big\{ \Big((\mathbf{u}, \mathbf{r}), (\mathbf{y}, \mathbf{v}) \Big) \in P \Big| \mathbf{u} = \mathbf{u_o} \text{ and } \mathbf{y} = \mathbf{y_o} \Big\}$.

2 Preliminaries

In our development, it is often convenient to view a discrete-time dynamical system as a set of feasible signals, even when a state-space description of the system is available. We thus begin this section by briefly reviewing this 'feasible signals' view of systems. We then present the recently proposed notion of ρ/μ approximation specialized to the class of systems of interest (namely systems with no exogenous inputs), and we state two relevant control synthesis results.

2.1 Systems and Performance Specifications

Readers are referred to [32] for a more detailed treatment of the basic concepts reviewed in this section. A discrete-time signal is an infinite sequence over some prescribed set (or "alphabet").

Definition 1. *A discrete-time system S is a set of pairs of signals, $S \subset \mathcal{U}^{\mathbb{Z}_+} \times \mathcal{Y}^{\mathbb{Z}_+}$, where $\mathcal{U}$ and $\mathcal{Y}$ are given alphabets.*

A discrete-time system is thus a process characterized by its feasible signals set. This description can be considered an extension of the graph theoretic approach [6] to the finite alphabet setting, and also shares some similarities with the behavioral approach [35] though we insist on differentiating between input and output signals upfront. In this setting, system properties of interest are captured by means of 'integral ρ/μ' constraints on the feasible signals.

Definition 2. *Consider a system $S \subset \mathcal{U}^{\mathbb{Z}_+} \times \mathcal{Y}^{\mathbb{Z}_+}$ and let $\rho : \mathcal{U} \to \mathbb{R}$ and $\mu : \mathcal{Y} \to \mathbb{R}$ be given functions. S is ρ/μ gain stable if there exists a finite non-negative constant γ such that*

$$\inf_{T \geq 0} \sum_{t=0}^{T} \gamma \rho(u(t)) - \mu(y(t)) > -\infty. \tag{1}$$

is satisfied for all $(\mathbf{u}, \mathbf{y})$ in S.

In particular, when ρ, μ are non-negative (and not identically zero), a notion of 'gain' can be defined.

Definition 3. *Consider a system $S \subset \mathcal{U}^{\mathbb{Z}_+} \times \mathcal{Y}^{\mathbb{Z}_+}$. Assume that S is ρ/μ gain stable for $\rho : \mathcal{U} \to \mathbb{R}_+$ and $\mu : \mathcal{Y} \to \mathbb{R}_+$, and that neither function is identically zero. The ρ/μ gain of S is the infimum of γ such that (1) is satisfied.*

Note that these notions of 'gain stability' and 'gain' can be considered extensions of the classical definitions to the finite alphabet setting. In particular, when $\mathcal{U}$, $\mathcal{Y}$ are Euclidean vector spaces and ρ, μ are Euclidean norms, we recover l_2 stability and l_2 gain. We are specifically interested in discrete-time plants that interact with their controllers through fixed discrete alphabets in a setting where no exogenous input is present:

Definition 4. *A system over finite alphabets S is a discrete-time system $S \subset \mathcal{U}^{\mathbb{Z}_+} \times (\mathcal{Y} \times \mathcal{V})^{\mathbb{Z}_+}$ whose alphabets $\mathcal{U}$ and $\mathcal{Y}$ are finite.*

Here $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$ represents the control input to the plant while $\mathbf{y} \in \mathcal{Y}^{\mathbb{Z}_+}$ and $\mathbf{v} \in \mathcal{V}^{\mathbb{Z}_+}$ represent the sensor and performance outputs of the plant, respectively. The plant dynamics may be analog, discrete or hybrid. Alphabet $\mathcal{V}$ may be finite, countable or infinite. The approximate models of the plant will be drawn from a specific class of models, namely deterministic finite state machines:

Definition 5. *A deterministic finite state machine (DFM) is a discrete-time system $S \subset \mathcal{U}^{\mathbb{Z}_+} \times \mathcal{Y}^{\mathbb{Z}_+}$ with finite alphabets $\mathcal{U}$, $\mathcal{Y}$, whose feasible input and output signals $(\mathbf{u}, \mathbf{y})$ are related by*

$$\begin{aligned} q(t+1) &= f(q(t), u(t)) \\ y(t) &= g(q(t), u(t)) \end{aligned}$$

where $t \in \mathbb{Z}_+$, $q(t) \in \mathcal{Q}$ for some finite set $\mathcal{Q}$ and functions $f : \mathcal{Q} \times \mathcal{U} \to \mathcal{Q}$ and $g : \mathcal{Q} \times \mathcal{U} \to \mathcal{Y}$.

$\mathcal{Q}$, f and g are understood to represent the set of states of the DFM, its state transition map, and its output map, respectively, in the traditional state-space sense.

Finally, we introduce the following notation for convenience: Given a system $P \subset \mathcal{U}^{\mathbb{Z}_+} \times (\mathcal{Y} \times \mathcal{V})^{\mathbb{Z}_+}$ and a choice of signals $\mathbf{u_o} \in \mathcal{U}^{\mathbb{Z}_+}$ and $\mathbf{y_o} \in \mathcal{Y}^{\mathbb{Z}_+}$, $P|_{\mathbf{u_o},\mathbf{y_o}}$ denotes the subset of feasible signals of P whose first component is $\mathbf{u_o}$ and whose second component is $\mathbf{y_o}$. That is

$$P|_{\mathbf{u_o},\mathbf{y_o}} = \Big\{ \Big(\mathbf{u}, (\mathbf{y}, \mathbf{v})\Big) \in P \Big| \mathbf{u} = \mathbf{u_o} \text{ and } \mathbf{y} = \mathbf{y_o} \Big\}.$$

Note that $P|_{\mathbf{u_o},\mathbf{y_o}}$ may be an empty set for specific choices of $\mathbf{u_o}$ and $\mathbf{y_o}$.

2.2 ρ/μ Approximations for Control Synthesis

The following definition is adapted from [28] for the case where the plant is not subject to exogenous inputs, of interest in this paper:

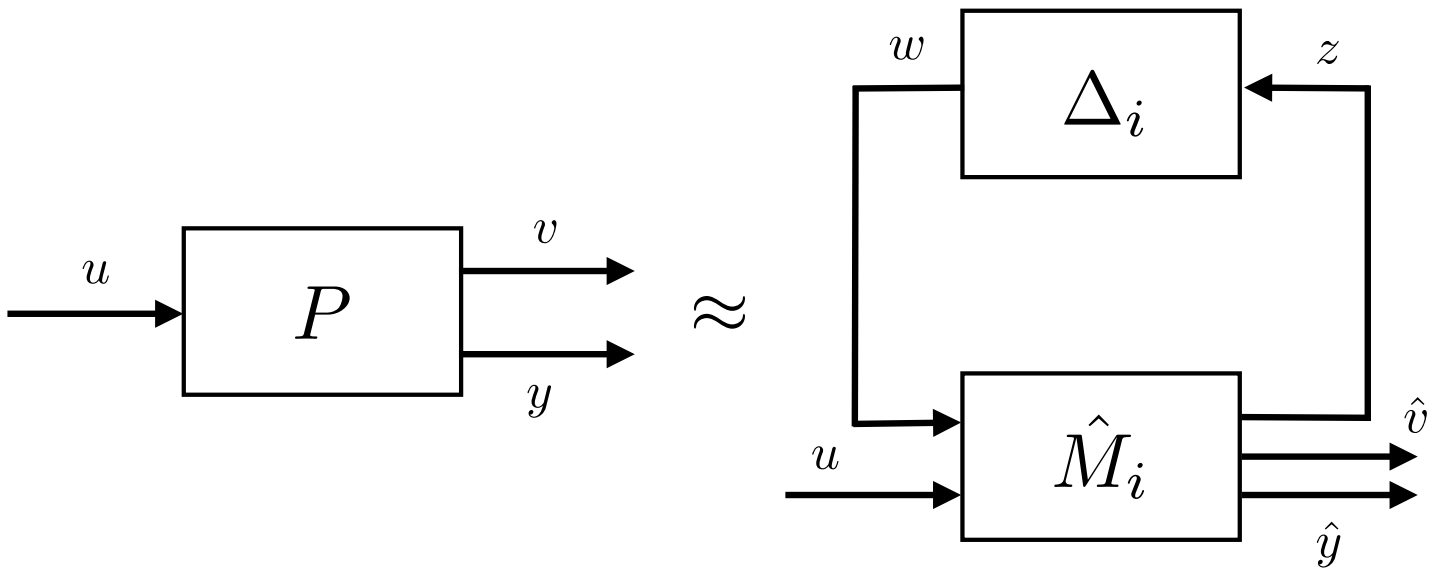

Figure 1: A finite state approximation of P

Definition 6. *(Adapted from Definition 6 in [28]) Consider a system over finite alphabets $P \subset \mathcal{U}^{\mathbb{Z}_+} \times (\mathcal{Y} \times \mathcal{V})^{\mathbb{Z}_+}$ and a desired closed loop performance objective*

$$\inf_{T \geq 0} \sum_{t=0}^{T} -\mu(v(t)) > -\infty \Leftrightarrow \sup_{T \geq 0} \sum_{t=0}^{T} \mu(v(t)) < \infty \tag{2}$$

*for given function $\mu : \mathcal{V} \to \mathbb{R}$. A sequence $\{\hat{M}_i\}_{i=1}^{\infty}$ of deterministic finite state machines $\hat{M}_i \subset (\mathcal{U} \times \mathcal{W})^{\mathbb{Z}_+} \times (\mathcal{Y} \times \hat{\mathcal{V}}_i \times \mathcal{Z})^{\mathbb{Z}_+}$ with $\hat{\mathcal{V}}_i \subset \mathcal{V}$ is a **ρ/μ approximation** of P if there exists a corresponding sequence of systems $\{\Delta_i\}_{i=1}^{\infty}$, $\Delta_i \subset \mathcal{Z}^{\mathbb{Z}^+} \times \mathcal{W}^{\mathbb{Z}_+}$, and non-zero functions $\rho_\Delta : \mathcal{Z}^{\mathbb{Z}_+} \to \mathbb{R}_+$, $\mu_\Delta : \mathcal{W}^{\mathbb{Z}_+} \to \mathbb{R}_+$, such that for every i:*

(a) There exists a surjective map $\psi_i : P \to \hat{P}_i$ satisfying

$$\psi_i\Big(P|_{\mathbf{u},\mathbf{y}}\Big) \subseteq \hat{P}_i|_{\mathbf{u},\mathbf{y}}$$

for all $(\mathbf{u}, \mathbf{y}) \in \mathcal{U}^{\mathbb{Z}_+} \times \mathcal{Y}^{\mathbb{Z}_+}$, where $\hat{P}_i \subset \mathcal{U}^{\mathbb{Z}_+} \times (\mathcal{Y} \times \hat{\mathcal{V}}_i)^{\mathbb{Z}_+}$ is the feedback interconnection of $\hat{M}_i$ and Δ_i as shown in Figure 1.

(b) For every feasible signal $(\mathbf{u}, (\mathbf{y}, \mathbf{v})) \in P$, we have

$$\mu(v(t)) \leq \mu(\hat{v}_{i+1}(t)) \leq \mu(\hat{v}_i(t)), \tag{3}$$

for all $t \in \mathbb{Z}_+$, where

$$(\mathbf{u}, (\hat{\mathbf{y}}_\mathbf{i}, \hat{\mathbf{v}}_\mathbf{i})) = \psi_i\Big((\mathbf{u}, (\mathbf{y}, \mathbf{v}))\Big),$$

$$(\mathbf{u}, (\hat{\mathbf{y}}_\mathbf{i+1}, \hat{\mathbf{v}}_\mathbf{i+1})) = \psi_{i+1}\Big((\mathbf{u}, (\mathbf{y}, \mathbf{v}))\Big).$$

(c) Δ_i *is* ρ_Δ/μ_Δ *gain stable, and moreover, the corresponding* ρ_Δ/μ_Δ *gains satisfy* $\gamma_i \geq \gamma_{i+1}$*.*

We complete our review of preliminaries by stating two results relevant to the problem of control synthesis. The first highlights the fact that a ρ/μ approximation of the plant together with an appropriately defined performance objective may be used to synthesize certified-by-design controllers for the original plant and performance objective:

Theorem 1. *(Adapted from Theorems 1 and 3 in [28]) Consider a plant* P *and a* ρ/μ *approximation* $\{\hat{M}_i\}$ *as in Definition 6. If for some index* i*, there exists a controller* $K \subset \mathcal{Y}^{\mathbb{Z}_+} \times \mathcal{U}^{\mathbb{Z}_+}$ *such that the feedback interconnection of* $\hat{M}_i$ *and* K*,* $(\hat{M}_i, K) \subset \mathcal{W}^{\mathbb{Z}_+} \times (\hat{\mathcal{V}}_i \times \mathcal{Z})^{\mathbb{Z}_+}$*, satisfies*

$$\inf_{T \geq 0} \sum_{t=0}^{T} \tau\mu_\Delta(w(t)) - \mu(\hat{v}(t)) - \tau\gamma_i\rho_\Delta(z(t)) > -\infty \tag{4}$$

for some $\tau > 0$*, then the feedback interconnection of* P *and* K*,* $(P, K) \subset \mathcal{V}^{\mathbb{Z}_+}$*, satisfies (2).*

The second provides a constructive value-iteration based approach for synthesizing a *full state* feedback controller for a given DFM in order to satisfy given performance objectives:

Theorem 2. *(Adapted from Theorem 4 in [33]) Consider a DFM* M *with state transition equation*

$$q(t+1) = f(q(t), u(t), w(t)),$$

and let $\sigma : \mathcal{Q} \times \mathcal{U} \times \mathcal{W} \to \mathbb{R}$ *be given. There exists a* $\varphi : \mathcal{Q} \to \mathcal{U}$ *such that the closed loop system* (M, φ) *satisfies*

$$\inf_{T \geq 0} \sum_{t=0}^{T} \sigma(q(t), \varphi(q(t)), w(t)) > -\infty. \tag{5}$$

iff the sequence of functions $J_k : \mathcal{Q} \to \mathbb{R}$*,* $k \in \mathbb{Z}_+$*, defined recursively by*

$$\begin{aligned} J_0 &= 0 \\ J_{k+1} &= \max\{0, \mathbb{T}(J_k)\} \end{aligned} \tag{6}$$

where $\mathbb{T}(J(q)) = \min_{u \in \mathcal{U}} \max_{w \in \mathcal{W}} \{-\sigma(q, u, w) + J(f(q, u, w))\}$*, converges.*

Note that in particular, a gain condition such as (4), can be written in the form (5) as the outputs $\hat{v}$ and z of $\hat{M}_i$ are functions of the state of $\hat{M}_i$ and its inputs.

3 Problem Setup

Given a discrete-time plant P described by

$$\begin{aligned} x(t+1) &= f(x(t), u(t)) \\ y(t) &= g(x(t)) \\ v(t) &= h(x(t)) \end{aligned} \tag{7}$$

where $t \in \mathbb{Z}_+$, $x(t) \in \mathbb{R}^n$, $u(t) \in \mathcal{U}$, $y(t) \in \mathcal{Y}$ and $v(t) \in \mathcal{V}$. No apriori constraints are placed on alphabet set $\mathcal{V}$: It may be a Euclidean space, the set of reals, or a countable or finite set. $\mathcal{U}$ and $\mathcal{Y}$ are given finite alphabets with $|\mathcal{U}| = m$ and $|\mathcal{Y}| = p$, respectively: They may represent quantized values of analog inputs and outputs, or may simply be symbolic inputs and outputs in general. Functions $f : \mathbb{R}^n \times \mathcal{U} \to \mathbb{R}^n$, $g : \mathbb{R}^n \to \mathcal{Y}$ and $h : \mathbb{R}^n \to \mathcal{V}$ are given.

Also given a performance objective

$$\sup_{T \geq 0} \sum_{t=0}^{T} \mu(v(t)) < \infty. \tag{2}$$

Our goal is to provide a systematic procedure for constructing a ρ/μ approximation of P. This would allow us to subsequently simplify the process of synthesizing a controller K such that the closed loop system (P, K) satisfies the desired performance objective.

4 A Special Structure

In [31], we proposed a special 'observer-inspired' structure and used it in conjunction with a particular state-space based finite state machine construction in order to approximate and subsequently design stabilizing controllers for a special class of systems, namely switched second order homogenous systems with binary outputs. In this section, we consider a generalization of this structure, modified to allow for finite but non-binary sensor output alphabets. We first show in Section 4.1 that under mild conditions, this generalized structure ensures the existence of function ψ_i as required in property (a) of Definition 6. Second, we address in Section 4.2 the related question of minimal construction of the disturbance alphabet set $\mathcal{W}$.

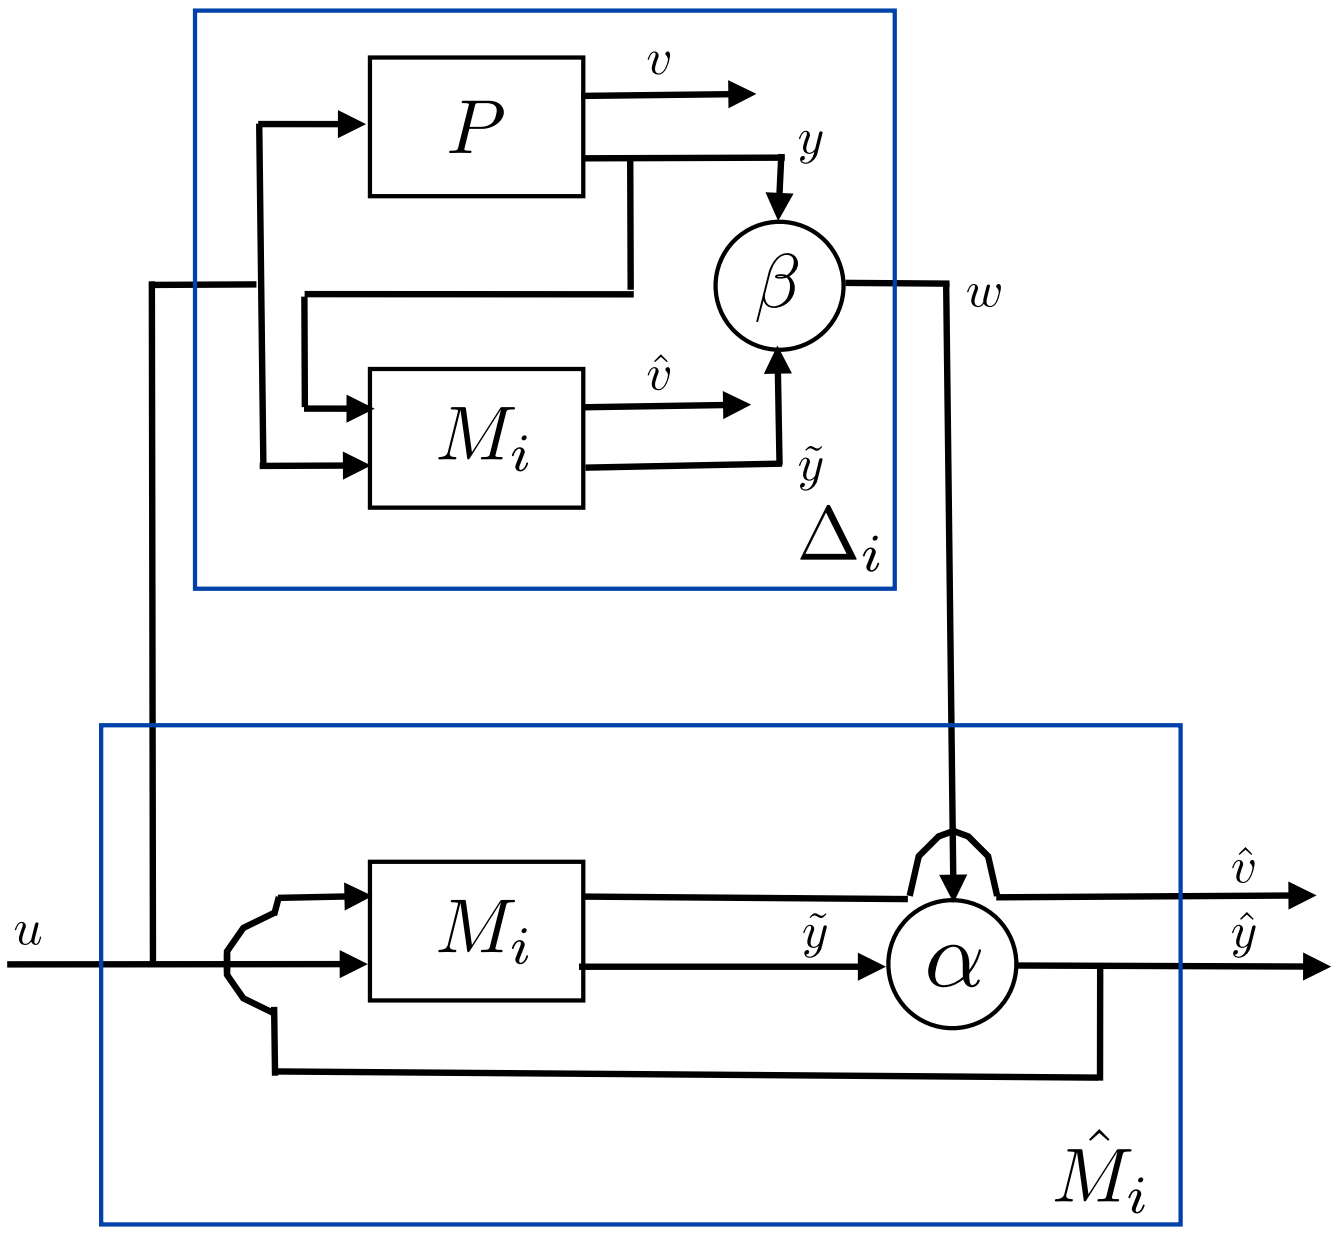

Figure 2: A special structure that ensures existence of ψ_i

4.1 Ensuring existence of ψ_i

We begin with the following observation, noting that there is no loss of generality in assuming that finite set $\mathcal{W}$ with cardinality $r+1$ is given by $\mathcal{W} = \{0, \ldots, r\}$:

Proposition 1. *Consider an alphabet set $\mathcal{Y}$ with $|\mathcal{Y}| = p$ and a set $\mathcal{W} = \{0, \ldots, r\}$. For sufficiently large r, there always exists functions $\beta : \mathcal{Y} \times \mathcal{Y} \to \mathcal{W}$ and $\alpha : \mathcal{Y} \times \mathcal{W} \to \mathcal{Y} \cup \{\epsilon\}$ such that*

$$\alpha\Big(\tilde{y}, \beta(\tilde{y}, y)\Big) = y$$

for all $y, \tilde{y} \in \mathcal{Y}$.

Proof. By construction. Let $r = p^2 - 1$. Associate with every pair $(y_1, y_2) \in \mathcal{Y}^2$ a unique element of $\mathcal{W}$, and define $\beta(y_1, y_2)$ to be equal to this element. Now define

$$\alpha(y', w) = \begin{cases} y & \text{if } \beta(y', y) = w \\ \epsilon & \text{otherwise} \end{cases}.$$

We have $\alpha\Big(\tilde{y}, \beta(\tilde{y}, y)\Big) = y$ for all $y, \tilde{y} \in \mathcal{Y}$, as desired. ☐

Consider the interconnection structure shown in Figure 2, and assume that the output $\tilde{y}$ of system M_i does not explicitly depend on the input y, to ensure that the interconnection is well-posed. We can now prove the following:

Lemma 1. *Consider a system $P \subset \mathcal{U}^{\mathbf{Z}_+} \times (\mathcal{Y} \times \mathcal{V})^{\mathbf{Z}_+}$ where $\mathcal{U}$ and $\mathcal{Y}$ are finite. Let $\mathcal{W}$ be a finite alphabet with sufficiently large cardinality, and let $\beta : \mathcal{Y} \times \mathcal{Y} \to \mathcal{W}$ and $\alpha : \mathcal{Y} \times \mathcal{W} \to \mathcal{Y} \cup \{\epsilon\}$ be such that $\alpha\Big(\tilde{y}, \beta(\tilde{y}, y)\Big) = y$ for all $y, \tilde{y} \in \mathcal{Y}$. Now consider the system shown in Figure 2. For any deterministic finite state machine $M_i \subset (\mathcal{U} \times \mathcal{Y})^{\mathbb{Z}_+} \times (\mathcal{Y} \times \hat{\mathcal{V}}_i)^{\mathbb{Z}_+}$ with* **fixed** *initial condition q_o, there exists a $\psi_i : P \to \hat{P}_i$, where $\hat{P}_i$ is the interconnection of $\hat{M}_i$ and Δ_i, such that ψ_i is surjective and $\psi_i\Big(P|_{\mathbf{u_o},\mathbf{y_o}}\Big) \subseteq \hat{P}_i|_{\mathbf{u_o},\mathbf{y_o}}$.*

Proof. The proof is by construction. We begin by noting that for sufficiently large $\mathcal{W}$, functions β and α with the desired property exist by Proposition 1. We also note that the condition $\alpha\Big(\tilde{y}, \beta(\tilde{y}, y)\Big) = y, \ \forall y, \tilde{y} \in \mathcal{Y}$ ensures that the output $\hat{\mathbf{y}} \in \mathcal{Y}^{\mathbb{Z}_+}$ of $\hat{P}_i$ matches the output $\mathbf{y} \in \mathcal{Y}^{\mathbb{Z}_+}$ of P for every choice of $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$. Now consider $\psi_{1,i} : P \to M_i$ defined by $\psi_{1,i}\Big((\mathbf{u}, (\mathbf{y}, \mathbf{v})\Big) = ((\mathbf{u}, \mathbf{y}), (\tilde{\mathbf{y}}, \hat{\mathbf{v}})) \in M_i$, where $(\tilde{\mathbf{y}}, \hat{\mathbf{v}})$ is the unique output response of M_i to input $(\mathbf{u}, \mathbf{y})$ for initial condition q_o. Also consider $\psi_{2,i} : \psi_{1,i}(P) \to \hat{P}_i$ defined by:

$$\psi_{2,i}\Big(((\mathbf{u}, \mathbf{y}), (\tilde{\mathbf{y}}, \hat{\mathbf{v}}))\Big) = (\mathbf{u}, (\mathbf{y}, \hat{\mathbf{v}}))$$

This map is well-defined and its image lies in $\hat{P}_i$ by virtue of the structure considered. Let $\psi_i = \psi_{2,i} \circ \psi_{1,i}$. Note that ψ_i is surjective since $\psi_{2,i}$ is surjective and $\psi_{2,i}^{-1}(\hat{P}_i) = \psi_1(P)$ by definition. Moreover, $\psi_i(P|_{\mathbf{u_o},\mathbf{y_o}}) \subseteq \hat{P}_i|_{\mathbf{u_o},\mathbf{y_o}}$ since

$$\psi_i(P|_{\mathbf{u_o},\mathbf{y_o}}) = \psi_{2,i}\Big(\psi_{1,i}(P|_{\mathbf{u_o},\mathbf{y_o}})\Big) = \psi_{2,i}\Big(((\mathbf{u_o}, \mathbf{y_o}), (\tilde{\mathbf{y}}, \hat{\mathbf{v}})) \in M_i\Big) \subseteq \hat{P}_i|_{\mathbf{u_o},\mathbf{y_o}}$$

which concludes our proof. □ □

It follows from Lemma 1 that by restricting ourselves to approximations $\{\hat{M}_i\}$ with the structure shown in Figure 2, where M_i (for each $i \in \mathbb{Z}_+$) is an arbitrary finite state machine with *fixed* initial condition, property (a) of Definition 6 is guaranteed by construction, and we only need worry about constructing $\{M_i\}$ to satisfy properties (b) and (c).

4.2 Choice of Alphabet Set $\mathcal{W}$

Next, we turn our attention in this setting to the choice of alphabet set $\mathcal{W}$: A set with minimal cardinality is desired, as the complexity of solving the full state feedback control synthesis problem, and hence the output feedback problem, grows with the cardinality of $\mathcal{W}$, as seen in Theorem 2. Thus, in this section, we address the following question: What is the minimal cardinality of $\mathcal{W}$ for which we are able to construct functions β and α with the property $\alpha\Big(\tilde{y}, \beta(\tilde{y}, y)\Big) = y$?

Lemma 2. *Given a set $\mathcal{Y}$ with $|\mathcal{Y}| = p$. Let $\mathcal{W}^* = \{0, 1, \ldots, p^* - 1\}$ be the smallest set for which there exists $\beta : \mathcal{Y} \times \mathcal{Y} \to \mathcal{W}$ and $\alpha : \mathcal{Y} \times \mathcal{W} \to \mathcal{Y} \cup \{\epsilon\}$ satisfying $\alpha\Big(\tilde{y}, \beta(\tilde{y}, y)\Big) = y$ for all $y, \tilde{y} \in \mathcal{Y}$. We have $p^* = p$.*

Proof. The proof is by construction. Consider a map $\beta : \mathcal{Y} \times \mathcal{Y} \to \mathcal{W}$ defined as shown in the Table 1, to be read as $\beta(y_1, y_1) = 0$, $\beta(y_2, y_1) = 1$, and so on.

Now consider function $\alpha : \mathcal{Y} \times \mathcal{W} \to \mathcal{Y} \cup \{\epsilon\}$ defined as

$$\alpha(y', w) = \begin{cases} y & \text{if } \beta(y', y) = w \\ \epsilon & \text{otherwise} \end{cases}$$

as in Proposition 1. By construction, each element of $\mathcal{W}$ appears *exactly once* in every row of the table. Thus α is a well-defined function, and it is straightforward to show by inspection that $\alpha\Big(\tilde{y}, \beta(\tilde{y}, y)\Big) = y$ for all $y, \tilde{y} \in \mathcal{Y}$. Finally, note that when $p^* < p$, some element of $\mathcal{W}$ would have to appear twice in each row of the table, thus rendering α ill-defined. □

	y_1	y_2	y_3	y_4	$\dots$	y_p
y_1	0	$p-1$	$p-2$	$p-3$	$\dots$	1
y_2	1	0	$p-1$	$p-2$	$\dots$	2
y_3	2	1	0	$p-1$	$\dots$	3
y_4	3	2	1	0		
$\vdots$	$\vdots$	$\vdots$	$\vdots$		$\ddots$	
y_p	$p-1$	$p-2$	$p-3$			0

Table 1: Definition of $\beta : \mathcal{Y} \times \mathcal{Y} \to \mathcal{W}$ when $|\mathcal{Y}| = p$

5 Construction of M_i

What remains is to construct a sequence of DFM $\{M_i\}$ that, when used in conjunction with the structure described in Section 4 and shown in Figure 2, ensures that properties (b) and (c) of Definition 6 are satisfied. We begin by giving the intuition behind this construction in Section 5.1 before discussing the details of the construction in Section 5.2.

5.1 Inspiration for the Construction

Consider a discrete-time SISO LTI system S described by

$$\begin{aligned} x(t+1) &= Ax(t) + Bu(t) \\ y(t) &= Cx(t) + Du(t) \end{aligned} \tag{8}$$

where $t \in \mathbb{Z}_+$, $x(t) \in \mathbb{R}^n$, $u(t) \in \mathbb{R}$, $y(t) \in \mathbb{R}$, and A, B and C are given matrices of appropriate dimensions, and D is a given scalar. Assume that the pair (C, A) is observable and the pair (A, B) is reachable. Under these conditions, following a fairly classical derivation that is omitted here for brevity, we can express the state of the system at the current time in terms of its past n inputs and outputs as

$$x(t) = \begin{bmatrix} A^n O^{-1} & R - A^n O^{-1} M \end{bmatrix} \begin{bmatrix} y(t-1) \\ \vdots \\ y(t-n) \\ u(t-1) \\ \vdots \\ u(t-n) \end{bmatrix}, \tag{9}$$

where $R = [B \; AB \; \dots \; A^{n-1}B]$ is the reachability matrix,

$$O = \begin{bmatrix} CA^{n-1} \\ CA^{n-2} \\ \vdots \\ C \end{bmatrix}$$

is a row permutation of the observability matrix, and M is the matrix of Markov parameters

$$M = \begin{bmatrix} D & CB & \dots & CA^{n-2}B \\ 0 & \ddots & \ddots & \vdots \\ \vdots & \ddots & \ddots & CB \\ 0 & \dots & 0 & D \end{bmatrix}.$$

This observation suggests an approach for constructing a sequence of approximate models of S starting from finite length input-output sequence pairs of S: The states of the k^{th} approximate model, $\hat{S}_k$, are thus those subsets of $\mathbb{R}^{2k}$ that constitute *feasible* snapshots of length k of the input-output behavior of S. In particular, for sufficiently long snapshots (i.e. for $k = n$), the approximate model converges to the original one. Indeed, when the current state of $\hat{S}_n$ is

$$\hat{x}(t) = [y(t-1), \ldots, y(t-n), u(t-1), \ldots, u(t-n)]'$$

its output in response to input $u(t)$ is uniquely defined and given by

$$\hat{y}(t) = \hat{C}\hat{x}(t) + Du(t)$$

where $\hat{C} = \begin{bmatrix} CA^nO^{-1} & CR - CA^nO^{-1}M \end{bmatrix}$. Likewise its next state in response to input $u(t)$ is uniquely defined and given by

$$\begin{aligned} \hat{x}(t+1) &= [\hat{C}\hat{x}(t) + Du(t), y(t-1), \ldots, y(t-n+1), u(t), u(t-1), \ldots, u(t-n+1)]' \\ &= \hat{A}\hat{x}(t) + \hat{B}u(t) \end{aligned}$$

for appropriately defined[1] matrices $\hat{A}$ and $\hat{B}$.

We wish to highlight three points:

1. If systems S and $\hat{S}_n$ are identically initialized, meaning that their initial states obey

$$x(0) = \begin{bmatrix} A^nO^{-1} & R - A^nO^{-1}M \end{bmatrix} \hat{x}(0)$$

their outputs will be identical for any choice of input $\mathbf{u} \in \mathbb{R}^{\mathbb{Z}_+}$. An alternative approach for comparing the responses of S and $\hat{S}_n$ without explicitly matching their initial states is by considering an "approximation error" Δ with the structure shown in Figure 2 (P then corresponds to S and M_i corresponds to $\hat{S}_n$). In this setup, $\hat{S}_n$ is additionally given access to the outputs of S, allowing it to estimate the initial state: State $\hat{x}(t)$ of $\hat{S}_n$ can thus be thought of as its the best instantaneous estimate of the state $x(t)$ of S. At time steps $t \leq n-1$, the state set of $\hat{S}$ is refined as follows

$$\hat{x}(0) \in \mathbb{R}^{2n},$$

$$\hat{x}(1) \in \{v \in \mathbb{R}^{2n} | v(1) = y(0), v_{n+1} = u(0)\},$$

$$\hat{x}(2) \in \{v \in \mathbb{R}^{2n} | v(1) = y(1), v(2) = y(0), v_{n+1} = u(1), v_{n+2} = u(0)\}$$

and so on. At time steps $t \geq n$, $\hat{x}(t)$ is uniquely defined by the expression in (9). The $\mathcal{L}_2$ gain of Δ, defined here as the infimum of $\gamma \geq 0$ such that the inequality

$$\inf_{T \geq 0} \sum_{t=0}^{T} \gamma^2 \|u(t)\||^2 - \|w(t)\|^2 > -\infty$$

holds, compares how well the outputs match after the transient (i.e. after $\hat{S}_n$ is done estimating the initial state of S): Note that the outputs of S and $\hat{S}_n$ will exactly match for all times $t \geq n$, the $\mathcal{L}_2$ gain of Δ in this case is zero, and $\hat{S}_n$ can be thought of as an "exact" model of S. The internal structure of Δ thus has a nice intuitive interpretation that may not have been as transparent to the readers when we introduced it in [31].

2. Output $\hat{y}(t)$ cannot explicitly depend on input $y(t)$, otherwise $\hat{S}_n$ can trivially match the output of S at every time step, rendering the comparison meaningless.

3. There does *not* exist a one-to-one correspondence between the states of S and $\hat{S}_n$: Since the kernel of matrix $\begin{bmatrix} A^nO^{-1} & R - A^nO^{-1}M \end{bmatrix}$ in (9) has non-zero dimension, one state of S can correspond to several states of $\hat{S}_n$, rendering this description inherently redundant.

While the use of $\hat{S}_n$ as an alternative to the LTI model in (8) of S is not justifiable here, this exercise suggests a procedure for constructing approximations of systems over finite alphabets: In that setting, $\mathcal{U}$ and $\mathcal{Y}$ are finite leading to approximate models with *finite* state-spaces.

---

[1] The exact expression for $\hat{A}$ and $\hat{B}$ is not relevant to the discussion, and is thus omitted for brevity.

5.2 Details of the Construction

Given a plant over finite alphabets as in (7) and a performance objective as in (2), we construct the corresponding sequence $\{M_i\}$ as follows: For each $i \in \mathbb{Z}_+$, M_i is a DFM described by

$$\begin{array}{rcl} q(t+1) & = & f_i(q(t), u(t), y(t)) \\ \tilde{y}(t) & = & g_i(q(t)) \\ \hat{v}(t) & = & h_i(q(t)) \end{array} \tag{10}$$

where $t \in \mathbb{Z}_+$, $q(t) \in \mathcal{Q}_i$, $u(t) \in \mathcal{U}$, $y(t) \in \mathcal{Y}$, $\tilde{y}(t) \in \mathcal{Y}$, and $\hat{v}(t) \in \hat{\mathcal{V}}_i$.

State Set: The state set is

$$\mathcal{Q}_i = \mathcal{Q}_{i,F} \cup \mathcal{Q}_{i,I} \cup \{q_\emptyset, q_o\}$$

where
$\mathcal{Q}_{i,F}$ - Set of final states. This is where the state of M_i evolves for $t \geq i$.
$\mathcal{Q}_{i,I}$ - Set of initial states. This is where the state of M_i evolves for $1 < t < i$.
$q_\emptyset$ - Impossible state. This is where the state of M_i transitions to when it encounters an input-output pair that does not correspond to plant P.
q_o - Initial state. This is the fixed initial state of M_i at $t = 0$.

More precisely, using the shorthand notation $f_u(x)$ to denote $f(x, u)$, we have

$\triangleright$ $\mathcal{Q}_{i,F} \subset \mathcal{Y}^i \times \mathcal{U}^i$, $q = (y_1, \ldots, y_i, u_1, \ldots, u_i) \in \mathcal{Q}_{i,F}$ if $\exists x_o \in \mathbb{R}^n$ such that

$$\begin{array}{rcl} y_i & = & g\Big(x_o\Big) \\ y_{i-1} & = & g\Big(f_{u_i}(x_o)\Big) \\ y_{i-2} & = & g\Big(f_{u_{i-1}} \circ f_{u_i}(x_o)\Big) \\ \vdots & = & \vdots \\ y_1 & = & g\Big(f_{u_2} \circ \cdots \circ f_{u_i}(x_o)\Big) \end{array} \tag{11}$$

$\triangleright$ $\mathcal{Q}_{i,I} = \mathcal{Q}_{i,I,1} \cup \ldots \cup \mathcal{Q}_{i,I,i}$ where $\mathcal{Q}_{i,I,j} \subset \mathcal{Y}^j \times \mathcal{U}^j$ and $q = (y_1, \ldots, y_j, u_1, \ldots, u_j) \in \mathcal{Q}_{i,I,j}$ if $\exists x_o \in \mathbb{R}^n$ such that

$$\begin{array}{rcl} y_j & = & g\Big(x_o\Big) \\ y_{j-1} & = & g\Big(f_{u_j}(x_o)\Big) \\ \vdots & = & \vdots \\ y_1 & = & g\Big(f_{u_2} \circ \cdots \circ f_{u_j}(x_o)\Big) \end{array} \tag{12}$$

Transition Function: The transition function $f_i : \mathcal{Q}_i \times \mathcal{U} \times \mathcal{Y} \to \mathcal{Q}_i$ is defined as follows:

$\triangleright$ For $q = (y_1, \ldots, y_i, u_1, \ldots, u_i) \in \mathcal{Q}_{i,F}$, we define

$$f(q, u, y) = \left\{ \begin{array}{cc} \overline{q} = (y, y_1, \ldots, y_{i-1}, u, u_1, \ldots, u_{i-1}) & \text{if } \overline{q} \in \mathcal{Q}_{i,F} \\ q_\emptyset & \text{otherwise} \end{array} \right.$$

$\triangleright$ For $q = q_o$, we define

$$f(q_o, u, y) = \left\{ \begin{array}{cc} \overline{q} = (y, u) & \text{if } \overline{q} \in \mathcal{Q}_{i,I,1} \\ q_\emptyset & \text{otherwise} \end{array} \right.$$

$\triangleright$ For $q = (y_1, \ldots, y_j, u_1, \ldots, u_j) \in \mathcal{Q}_{i,I,j}$, we define

$$f(q,u,y) = \begin{cases} \overline{q} = (y, y_1, \ldots, y_j, u, u_1, \ldots, u_j) & \text{if } \overline{q} \in \mathcal{Q}_{i,I,j+1} \cup \mathcal{Q}_{i,F} \\ q_\emptyset & \text{otherwise} \end{cases}$$

$\triangleright$ For $q_\emptyset$, we define $f(q_\emptyset, u, y) = q_\emptyset$ for all $u \in \mathcal{U}$ and $y \in \mathcal{Y}$.

Output Functions: We begin by associating with every $q \in \mathcal{Q}_i$ a subset $X(q)$ of $\mathbb{R}^n$ defined as follows:

$\triangleright$ For $q = (y_1, \ldots, y_i, u_1, \ldots, u_i) \in \mathcal{Q}_{i,F}$, let

$$X_o = \{\ x_o \in \mathbb{R}^n | x_o \text{ satisfies (11)}\} \tag{13}$$

and define

$$X(q) = f_{u_1} \circ \ldots \circ f_{u_i}(X_o) \tag{14}$$

$\triangleright$ For $q = (y_1, \ldots, y_j, u_1, \ldots, u_j) \in \mathcal{Q}_{i,I,j}$, let

$$X_o = \{\ x_o \in \mathbb{R}^n | x_o \text{ satisfies (12)}\} \tag{15}$$

and define

$$X(q) = f_{u_1} \circ \ldots \circ f_{u_j}(X_o) \tag{16}$$

$\triangleright$ Define

$$X(q) = \begin{cases} \mathbb{R}^n, & q = q_o \\ \emptyset, & q = q_\emptyset \end{cases} \tag{17}$$

We can also associate with every $q \in \mathcal{Q}_i$ a subset $Y(q)$ of $\mathcal{Y}$ defined as

$$Y(q) = g(X(q)) \tag{18}$$

We are now ready to define the output function $g_i : \mathcal{Q}_i \to \mathcal{Y}$ as

$$g_i(q) = \begin{cases} y \text{ for some } y \in \mathcal{Y}, & \text{if } Y(q) = \emptyset \\ y \text{ for some } y \in Y(q), & \text{otherwise} \end{cases} \tag{19}$$

The output function $h_i : \mathcal{Q}_i \to \hat{\mathcal{V}}_i$ is defined as

$$h_i(q) = \begin{cases} h\Big(argmax_{x \in X(q)} \mu(h(x))\Big), & q \in \mathcal{Q}_{i,F} \cup \mathcal{Q}_{i,I} \cup \{q_o\} \\ h\Big(argmin_{x \in \mathbb{R}^n} \mu(h(x))\Big), & q = q_\emptyset \end{cases} \tag{20}$$

Output Set: The output set $\hat{\mathcal{V}}_i$ is defined as

$$\hat{\mathcal{V}}_i = \bigcup_{q \in \mathcal{Q}_i} h_i(q)$$

Remark 1. *We conclude this section with a few observations:*

1. *The output of M_i corresponding to a state q is chosen arbitrarily among the feasible options. The possibility of error is accounted for in the gain γ_i of Δ_i.*
2. *Our definition of the performance output function h_i assumes that the map $\mu : \mathbb{R} \to \mathbb{R}$ has a well-defined minimum and maximum. This places some mild restrictions on the original problem.*

6 ρ/μ Approximation Properties of the Construction

In this Section, we show that the construction of $\{M_i\}$ proposed in Section 5.2 together with the structure analyzed in Section 4 indeed allows us to meet the remaining two properties of Definition 6, namely properties (b) and (c).

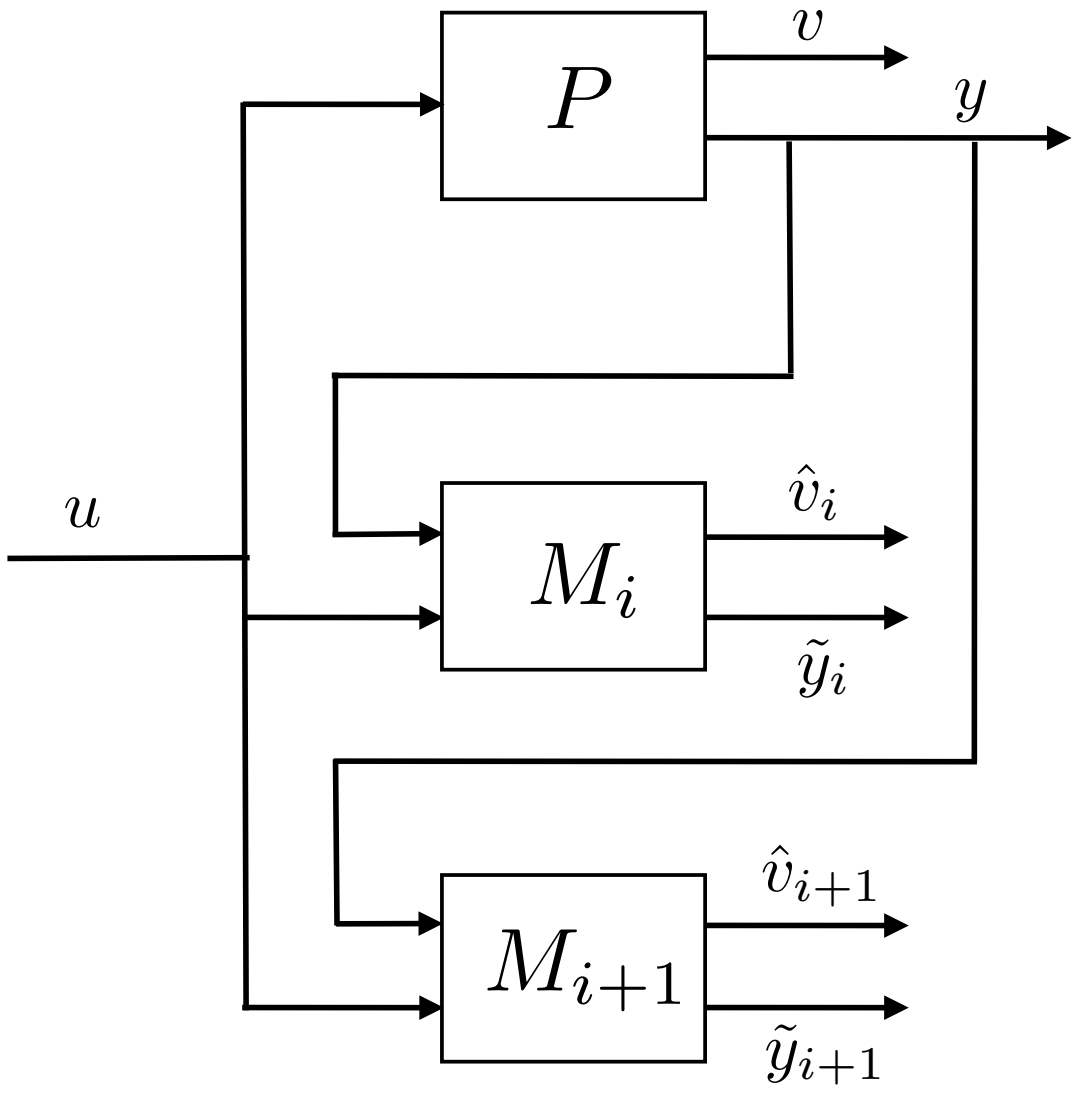

Figure 3: Interconnection of P, M_i and M_{i+1}

6.1 Meeting the Condition on the Performance Objectives

Proposition 2. *Consider a plant P as in (7), a performance objective as in (2), and a DFM M_i constructed following the procedure given in Section 5.2 for some $i \geq 1$. Consider the interconnection of P and M_i as shown in Figure 3. Let $x(t)$ and $q_i(t)$ be the states of P and M_i, respectively, at time t. We have $x(t) \in X(q(t))$ for all $t \geq 0$, for any choice of $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, $x(0) \in \mathbb{R}^n$.*

Proof. Pick a choice $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$ and $x(0) \in \mathbb{R}^n$. At $t = 0$, $q(0) = q_o$ and $X(q_o) = \mathbb{R}^n$ by construction. Thus $x(0) \in X(q(0))$. For $1 \leq t < i$, we can write

$$X(q(t)) = \Big\{x \in \mathbb{R}^n | x = f_{u(t-1)} \circ \ldots \circ f_{u(0)}(x_o) \text{ for some } x_o \in \mathbb{R}^n \text{ that satisfies (12)}\Big\}.$$

Thus $x(t) \in X(q(t))$ since it can indeed be written in that form for some x_o, namely the initial state of P, $x_o = x(0)$, and x_o satisfies (12). For $t \geq i$, we can write

$$X(q(t)) = \Big\{x \in \mathbb{R}^n | x = f_{u(t-1)} \circ \ldots \circ f_{u(t-i)}(x_o) \text{ for some } x_o \in \mathbb{R}^n \text{ that satisfies (11)}\Big\}.$$

Again we have $x(t) \in X(q(t))$, since $x(t)$ can be written as $x(t) = f_{u(t-1)} \circ \ldots \circ f_{u(t-i)}(x(t-i))$, and $x(t-i)$ satisfies (11). Finally, we note that our argument is independent of the specific choice of $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, and is also independent of the initial state of P, which concludes our proof. ☐

Proposition 3. *Consider a plant P as in (7), a performance objective as in (2), and a DFM M_i constructed following the procedure given in Section 5.2 for some $i \geq 1$. Consider the interconnection of P and M_i as shown in Figure 3. We have $\mu(v(t)) \leq \mu(\hat{v}_i(t))$ for all $t \geq 0$, for any choice of $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, $x(0) \in \mathbb{R}^n$.*

Proof. Pick a choice $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$ and $x(0) \in \mathbb{R}^n$. It follows from Proposition 2 that the corresponding state trajectories of P and M_i satisfy $x(t) \in X(q(t))$, for all $t \in \mathbb{Z}_+$. We have $q(t) \neq q_\emptyset$ for all t, since M_i is driven by a *feasible* pair $(\mathbf{u}, \mathbf{y})$ of P in this setup. Let $\overline{x}_i(t) = argmax_{x \in X(q_i(t))} \mu(h(x(t)))$. It follows from (20) that

$$\mu(v(t)) = \mu(h(x(t)) \leq \mu\Big(h(x_i(t))\Big) = \mu(\hat{v}_i(t)).$$

One again, noting that our argument is independent of the specific choice of $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, and of the initial state of P, we conclude our proof. ☐

Proposition 4. *Consider a plant* P *as in (7), a performance objective as in (2), two DFM* M_i *and* M_{i+1} *constructed following the procedure given in Section 5.2 for some* $i \geq 1$. *Consider the interconnection of* P, M_i *and* M_{i+1} *as shown in Figure 3. We have* $\mu(\hat{v}_{i+1}(t)) \leq \mu(\hat{v}_i(t))$ *for all* $t \geq 0$, *for any choice of* $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, $x(0) \in \mathbb{R}^n$.

Proof. Pick a choice $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$ and $x(0) \in \mathbb{R}^n$. Let $q_i(t)$ and $q_{i+1}(t)$ denote the states of M_i and M_{i+1}, respectively, at time t. For $1 \leq t < i$, we can write

$$X(q_i(t)) = \Big\{x \in \mathbb{R}^n | x = f_{u(t-1)} \circ \ldots \circ f_{u(0)}(x_o) \text{ for some } x_o \in \mathbb{R}^n \text{ that satisfies (12)}\Big\}$$

and

$$X(q_{i+1}(t)) = \Big\{x \in \mathbb{R}^n | x = f_{u(t-1)} \circ \ldots \circ f_{u(0)}(x_o) \text{ for some } x_o \in \mathbb{R}^n \text{ that satisfies (12)}\Big\}.$$

Since $X(q_i(t)) = X(q_{i+1}(t))$, it follows from (20) that $\mu(\hat{v}_{i+1}(t)) = \mu(\hat{v}_i(t))$ for all $1 \leq t < i$. For $t \geq i$, we can write

$$X(q_i(t)) = \Big\{x \in \mathbb{R}^n | x = f_{u(t-1)} \circ \ldots \circ f_{u(t-i)}(x_o) \text{ for some } x_o \in \mathbb{R}^n \text{ that satisfies (11)}\Big\}$$

and

$$X(q_{i+1}(t)) = \Big\{x \in \mathbb{R}^n | x = f_{u(t-1)} \circ \ldots \circ f_{u(t-i-1)}(x_o) \text{ for some } x_o \in \mathbb{R}^n \text{ that satisfies (11)}\Big\},$$

with i replaced by $i+1$ in (11). Thus $X(q_{i+1}(t)) \subseteq X(q_i(t))$. Letting $\overline{x}_i(t) = argmax_{x \in X(q_i(t))} \mu(h(x(t)))$ and $\overline{x}_{i+1}(t) = argmax_{x \in X(q_{i+1}(t))} \mu(h(x(t)))$, it follows from (20) that

$$\mu(\hat{v}_{i+1}(t)) = \mu(h(\overline{x}_{i+1}(t))) \leq \mu(h(\overline{x}_i(t))) = \mu(\hat{v}_i(t)).$$

Finally, we note that our argument is independent of the specific choice of $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, and is also independent of the initial state of P, which concludes our proof. ☐ ☐

We can now state and prove the main result in this Section:

Lemma 3. *Consider a plant* P *as in (7), a performance objective as in (2), and a sequence of DFM* $\{M_i\}$ *constructed following the procedure given in Section 5.2. For every* $(\mathbf{u}, (\mathbf{y}, \mathbf{v})) \in P$, *we have*

$$\mu(v(t)) \leq \mu(\hat{v}_{i+1}(t)) \leq \mu(\hat{v}_i(t)), \tag{3}$$

for all $t \in \mathbb{Z}_+$, *where*

$$(\mathbf{u}, (\mathbf{\hat{y}_i}, \mathbf{\hat{v}_i})) = \psi_i\Big((\mathbf{u}, (\mathbf{y}, \mathbf{v}))\Big),$$

$$(\mathbf{u}, (\mathbf{\hat{y}_{i+1}}, \mathbf{\hat{v}_{i+1}})) = \psi_{i+1}\Big((\mathbf{u}, (\mathbf{y}, \mathbf{v}))\Big).$$

Proof. Recall from the proof of Lemma 1 that map ψ_i was constructed as $\psi_{2,i} \circ \psi_{1,i}$ where $\psi_{1,i} : P \to M_i$ is defined by

$$\psi_{1,i}\Big((\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})\Big) = ((\mathbf{u_o}, \mathbf{y_o}), (\tilde{\mathbf{y}}_i, \hat{\mathbf{v}}_i)) \in M_i.$$

Here $(\tilde{\mathbf{y}}, \hat{\mathbf{v}}_i)$ is the *unique* output response of M_i to input $(\mathbf{u}_o, \mathbf{y_o})$ for initial condition $q_i(0)$. Also recall that $\psi_{2,i} : \psi_{1,i}(P) \to \hat{P}_i$ was defined by:

$$\psi_{2,i}\Big(((\mathbf{u_o}, \mathbf{y_o}), (\tilde{\mathbf{y}}_i, \hat{\mathbf{v}}_i))\Big) = (\mathbf{u_o}, (\mathbf{y_o}, \hat{\mathbf{v}}_o))$$

Thus it suffices to show that for any $(\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})) \in P$, the outputs of M_i and M_{i+1}, $(\tilde{\mathbf{y}}_i, \hat{\mathbf{v}}_i)$ and $(\tilde{\mathbf{y}}_{i+1}, \hat{\mathbf{v}}_{i+1})$, respectively, in response to input $(\mathbf{u}_o, \mathbf{y_o})$, satisfy the desired condition. This follows directly from Propositions 3 and 4. ☐

6.2 Meeting the Condition on the Gains

Next, we show that under some mild assumptions, the proposed construction of $\{M_i\}$ meets property (c) of Definition 6. We begin with some definitions:

Definition 7. *A function* $\mu : \mathcal{W} \to \mathbb{R}_+$ *is positive definite if* $\mu(w) \geq 0$ *for all* $w \in \mathcal{W}$ *and* $\mu(w) = 0$ *iff* $w = 0$.

Definition 8. *Consider a sequence of DFM,* $\{M_i\}$*, constructed as described in Section 5.2. The sequence* $\{M_i\}$ *is output-nested if for every* $i \in \mathbb{Z}_+$*, and for every*

$$q = (y_1, \ldots, y_i, u_1, \ldots, u_i)' \in \mathcal{Q}_i,$$

$$\overline{q} = (y_1, \ldots, y_i, y_{i+1}, u_1, \ldots, u_i, u_{i+1})' \in \mathcal{Q}_{i+1}$$

with $|Y(\overline{q})| > 1$*, the equality* $g_{i+1}(\overline{q}) = g_i(q)$ *holds.*

We can now prove the following:

Proposition 5. *Consider a plant P as in (7), a performance objective as in (2), and two DFM* M_i *and* M_{i+1} *constructed following the procedure given in Section 5.2, for some* $i \geq 1$*. Assume that the sequence* $\{M_i\}$ *is output nested, and consider the interconnection of P,* M_i *and* M_{i+1} *as shown in Figure 3. Let* $w_i(t) = \beta(y(t), \tilde{y}_i(t))$ *and* $w_{i+1}(t) = \beta(y(t), \tilde{y}_{i+1}(t))$ *for* β *defined as in Table 1 given in the proof of Lemma 2. For any choice of* $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$*, initial state* $x(0) \in \mathbb{R}^n$ *of P, and* μ_Δ *positive definite, we have*

$$\mu_\Delta(w_{i+1}(t)) \leq \mu_\Delta(w_i(t)).$$

Proof. Pick a choice $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, $x_o \in \mathbb{R}^n$, and $\mu_\Delta : \mathcal{W} \to \mathbb{R}_+$ positive definite. Let $q_i(t)$ and $q_{i+1}(t)$ denote the states of M_i and M_{i+1}, respectively, at time t. By arguments similar to those made in the proof of Proposition 4, omitted here for brevity, we have

$$\begin{cases} X(q_{i+1}(t)) = X(q_i(t)), & \text{for } 1 \leq t < i \\ X(q_{i+1}(t)) \subseteq X(q_i(t)), & \text{for } t \geq i \end{cases}$$

It thus follows that

$$\begin{cases} Y(q_{i+1}(t)) = Y(q_i(t)), & \text{for } 1 \leq t < i \\ Y(q_{i+1}(t)) \subseteq Y(q_i(t)), & \text{for } t \geq i \end{cases}$$

For $1 \leq t < i$, since $\{M_i\}$ is output nested, we have $\tilde{y}_i(t) = \tilde{y}_{i+1}(t)$, thus $w_i(t) = w_{i+1}(t)$ and $\mu_\Delta(w_i(t)) = \mu_\Delta(w_{i+1}(t))$. On the other hand, for $t \geq i$ we can consider two cases: First, if $|Y(q_{i+1}(t))| = 1$, we have

$$\begin{aligned} |Y(q_{i+1}(t))| = 1 \quad &\Rightarrow \quad y(t) = \tilde{y}_{i+1}(t) \\ &\Rightarrow \quad w_{i+1}(t) = 0 \\ &\Rightarrow \quad \mu_\Delta(w_{i+1}(t)) = 0 \\ &\Rightarrow \quad \mu_\Delta(w_{i+1}(t)) \leq \mu_\Delta(w_i(t)) \end{aligned}$$

where the first implication follows from Proposition 2 and the third and fourth follow from the positive definiteness of μ_Δ. Second, if $|Y(q_{i+1}(t))| > 1$, we have

$$\begin{aligned} |Y(q_{i+1}(t))| > 1 \quad &\Rightarrow \quad g_{i+1}(q_{i+1}(t)) = g_i(q_i(t)) \\ &\Rightarrow \quad \tilde{y}_{i+1}(t) = \tilde{y}_i(t) \\ &\Rightarrow \quad w_{i+1}(t) = w_i(t) \\ &\Rightarrow \quad \mu_\Delta(w_{i+1}(t)) = \mu_\Delta(w_i(t)) \end{aligned}$$

where the first implication follows from the assumption that $\{M_i\}$ is output-nested. We thus conclude that

$$\mu_\Delta(w_{i+1}(t)) \leq \mu_\Delta(w_i(t)), \ \forall t \geq 0.$$

What is left is to note that our argument was independent of the choice of $\mathbf{u} \in \mathcal{U}^{\mathbb{Z}_+}$, $x(0) \in \mathbb{R}^n$, and positive definite function μ_Δ. $\square$

We are now ready to state and prove the first main result in this section:

Lemma 4. *Consider a plant P as in (7), a performance objective as in (2), and a sequence of DFM $\{M_i\}$ constructed following the procedure given in Section 5.2. Assume that μ_Δ is positive definite and the sequence $\{M_i\}$ is output-nested. For any $i \geq 1$, the gains of Δ_i and Δ_{i+1} satisfy $\gamma_i \geq \gamma_{i+1}$.*

Proof. Recall from the proof of Lemma 1 that map ψ_i was constructed as $\psi_{2,i} \circ \psi_{1,i}$ where $\psi_{1,i} : P \to M_i$ is defined by

$$\psi_{1,i}\Big((\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})\Big) = ((\mathbf{u_o}, \mathbf{y_o}), (\tilde{\mathbf{y}}_i, \hat{\mathbf{v}}_i)) \in M_i,$$

where $(\tilde{\mathbf{y}}, \hat{\mathbf{v}}_i)$ is the *unique* output response of M_i to input $(\mathbf{u}_o, \mathbf{y_o})$ for fixed initial condition $q_i(0)$. Also recall that $\psi_{2,i} : \psi_{1,i}(P) \to \hat{P}_i$ was defined by:

$$\psi_{2,i}\Big(((\mathbf{u_o}, \mathbf{y_o}), (\tilde{\mathbf{y}}_i, \hat{\mathbf{v}}_i))\Big) = (\mathbf{u_o}, (\mathbf{y_o}, \hat{\mathbf{v}}_o))$$

Thus it suffices to show that for any $(\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})) \in P$, the outputs of M_i and M_{i+1} in response to input $(\mathbf{u}_o, \mathbf{y_o})$, $(\tilde{\mathbf{y}}_i, \hat{\mathbf{v}}_i)$ and $(\tilde{\mathbf{y}}_{i+1}, \hat{\mathbf{v}}_{i+1})$, respectively, satisfy the desired condition.

Let γ_i be the gain of Δ_i. Pick a choice of $(\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})) \in P$, and let $(\tilde{\mathbf{y}}_i, \hat{\mathbf{v}}_i)$ and $(\tilde{\mathbf{y}}_{i+1}, \hat{\mathbf{v}}_{i+1})$ be the unique outputs of M_i and M_{i+1}, respectively, in response to input $(\mathbf{u}_o, \mathbf{y_o})$. It follows from Proposition 5 that

$$\begin{aligned}
\mu_\Delta(w_{i+1}(t)) \leq \mu_\Delta(w_i(t)),\ \forall t \quad &\Rightarrow \quad -\mu_\Delta(w_{i+1}(t)) \geq -\mu_\Delta(w_i(t)),\ \forall t \\
&\Rightarrow \quad \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_{i+1}(t)) \geq \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_i(t)),\ \forall t \\
&\Rightarrow \quad \sum_{t=0}^{T} \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_{i+1}(t)) \geq \sum_{t=0}^{T} \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_i(t)),\ \forall T \\
&\Rightarrow \quad \sum_{t=0}^{T} \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_{i+1}(t)) \geq \inf_{t\geq 0} \sum_{t=0}^{T} \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_i(t)),\ \forall T \\
&\Rightarrow \quad \inf_{T\geq 0} \sum_{t=0}^{T} \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_{i+1}(t)) \geq \inf_{t\geq 0} \sum_{t=0}^{T} \gamma_i\rho_\Delta(u_o(t)) - \mu_\Delta(w_i(t))
\end{aligned}$$

Letting $\tilde{\gamma}_{i+1} = \inf \gamma$ such that

$$\inf_{T\geq 0} \sum_{t=0}^{T} \gamma\rho_\Delta(u_o(t)) - \mu_\Delta(w_{i+1}(t)) > -\infty,$$

we have $\tilde{\gamma}_{i+1} \leq \gamma_i$. Since this argument holds for any choice of $(\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})) \in P$, we have

$$\gamma_{i+1} = \inf\{\tilde{\gamma}_{i+1}\} \leq \gamma_i,$$

where the 'inf' is understood to be taken over all possible choices of feasible signals of P. ☐

Note that Lemma 4, while effectively establishing a hierarchy of approximations, did not address the question: When is γ_i finite? A straightforward way to guarantee that is to require $\rho_\Delta(z) > 0$ for all z. While this may be meaningful in a setup where we have no preference for particular choices of control inputs (since $u = z$ in our proposed structure), this may be too restrictive in general. We thus propose, in what follows, a readily verifiable sufficient condition to ensure that $\gamma_i < \infty$ without requiring ρ_Δ to be strictly positive.

Proposition 6. *Consider a plant P as in (7), a performance objective as in (2), a positive definite function $\mu_\Delta : \mathcal{W} \to \mathbb{R}_+$, and a DFM M_i constructed following the procedure given in Section 5.2, for some $i \geq 1$. Let γ_i be the gain of the corresponding error system Δ_i, and define a new 'output' function for M_i, $e : \mathcal{Q}_i \to \mathbb{R}_+$, defined by*

$$e(q) = \begin{cases} 0 & \textit{if } |Y(q)| = 1 \textit{ or } q = q_\emptyset \\ \max\limits_{w\in\mathcal{W}} \mu_\Delta(w) & \textit{otherwise} \end{cases}$$

Let $\hat{\gamma}_i$ be the infimum of γ such that M_i satisfies

$$\inf_{T \geq 0} \sum_{t=0}^{T} \gamma \rho_\Delta(u(t)) - e(t) > -\infty.$$

We have $\gamma_i \leq \hat{\gamma}_i$.

Proof. Pick a choice of $(\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})) \in P$, consider the interconnection of P and M_i as shown in Figure 3, let $x(t)$ and $q(t)$ be the states of P and M_i, respectively , at time t, and let $e(t)$ be the corresponding 'new' output of M_i. When $|Y(q(t))| = 1$, we have $x(t) \in X(q(t))$ by Proposition 2, and thus $y(t) = \tilde{y}_i(t)$, $w(t) = 0$ (in the corresponding Δ_i), and $e(t) = \mu(w(t))$. When $|Y(q(t))| > 1$, we have $e(t) = \max_{w \in \mathcal{W}} \mu_\Delta(w) \geq \mu_\Delta(w(t))$. It thus follows that $e(t) \geq \mu_\Delta(w(t))$ for all $t \geq 0$, and we can write

$$\begin{aligned}
\mu_\Delta(w(t)) \leq e(t),\ \forall t \quad & \Rightarrow \quad -\mu_\Delta(w(t)) \geq -e(t),\ \forall t \\
& \Rightarrow \quad \hat{\gamma}_i \rho_\Delta(u_o(t)) - \mu_\Delta(w(t)) \geq \hat{\gamma}_i \rho_\Delta(u_o(t)) - e(t),\ \forall t \\
& \Rightarrow \quad \sum_{t=0}^{T} \hat{\gamma}_i \rho_\Delta(u_o(t)) - \mu_\Delta(w(t)) \geq \sum_{t=0}^{T} \hat{\gamma}_i \rho_\Delta(u_o(t)) - e(t),\ \forall T \\
& \Rightarrow \quad \sum_{t=0}^{T} \hat{\gamma}_i \rho_\Delta(u_o(t)) - \mu_\Delta(w(t)) \geq \inf_{t \geq 0} \sum_{t=0}^{T} \hat{\gamma}_i \rho_\Delta(u_o(t)) - e(t),\ \forall T \\
& \Rightarrow \quad \inf_{T \geq 0} \sum_{t=0}^{T} \hat{\gamma}_i \rho_\Delta(u_o(t)) - \mu_\Delta(w(t)) \geq \inf_{t \geq 0} \sum_{t=0}^{T} \hat{\gamma}_i \rho_\Delta(u_o(t)) - e(t)
\end{aligned}$$

Letting $\tilde{\gamma}_i = \inf \gamma$ such that

$$\inf_{T \geq 0} \sum_{t=0}^{T} \gamma \rho_\Delta(u_o(t)) - \mu_\Delta(w(t)) > -\infty,$$

we have $\tilde{\gamma}_i \leq \hat{\gamma}_i$. Since this argument holds for any choice of $(\mathbf{u_o}, (\mathbf{y_o}, \mathbf{v})) \in P$, we have

$$\gamma_i = \inf\{\tilde{\gamma}_i\} \leq \hat{\gamma}_i,$$

where the 'inf' is understood to be taken over all possible choices of feasible signals of P. ☐

Proposition 6 essentially establishes an upper bound for the gain γ_i of Δ_i, verified by checking that M_i *alone* satisfies a suitably defined gain condition. This is readily verifiable using standard techniques from linear programming, or alternatively from network flow problems: Readers are referred to [32] for the details. However, here, we are not interested in computing $\hat{\gamma}_i$. Rather, we are simply interested in verifying that it is *finite*. As such, we can simplify the problem even further, by requiring a suitably defined gain condition to be met by a new DFM, referred to as the '0-reduction' of M_i.

Definition 9. *Consider a DFM $M_i \subset (\mathcal{U} \times \mathcal{Y})^{\mathbb{Z}_+} \times (\mathcal{Y} \times \hat{\mathcal{V}}_i \times \mathbb{R}_+)^{\mathbb{Z}_+}$ and a choice $\rho_\Delta : \mathcal{U} \to \mathbb{R}_+$. Let $\overline{\mathcal{U}} = \{u \in \mathcal{U} | \rho_\Delta(u) = 0\}$. The 0-reduction of M_i, denoted by $\overline{M}_i$, is a new DFM, $\overline{M}_i \subset (\overline{\mathcal{U}} \times \mathcal{Y})^{\mathbb{Z}_+} \times (\mathcal{Y} \times \hat{\mathcal{V}}_i \times \mathbb{R}_+)^{\mathbb{Z}_+}$, obtained from M_i by restricting the first input of M_i to $\overline{\mathcal{U}}$.*

Remark 2. *It follows from Definition 9 that a state q of M_i, $q = (y_1, \ldots, y_j, u_1, \ldots, u_j) \in \mathcal{Q}_i$ (for some $j \in \{0, \ldots, i\}$), is a state of $\overline{M}_i$ iff $u_k \in \overline{\mathcal{U}}$ for* **all** *$k \in \{1, \ldots, j\}$. The number of states of $\overline{M}_i$ can thus be significantly lower than that of M_i.*

We can now propose the following sufficient condition to ensure that γ_i is bounded:

Lemma 5. *Consider a plant P as in (7), a performance objective as in (2), a positive definite function $\mu_\Delta : \mathcal{W} \to \mathbb{R}_+$, and a DFM M_i constructed following the procedure given in Section 5.2, for some $i \geq 1$. Let*

γ_i be the gain of the corresponding error system Δ_i. Define a new 'output' function $e : \mathcal{Q}_i \to \mathbb{R}_+$ for M_i as in Proposition 6, and let $\overline{M}_i$ be the 0-reduction of M_i. If $\overline{M}_i$ satisfies

$$\inf_{T \geq 0} \sum_{t=0}^{T} \gamma \rho_\Delta(u(t)) - e(t) > -\infty \tag{21}$$

for some finite γ, then γ_i is finite.

Proof. Construct a graph (or a network flow problem) corresponding to M_i by associating with every state transition of M_i a cost, namely '$\gamma \rho_\Delta(u) - e$' defined by the input u that drives the transition and the output e associated with the beginning state of the transition. M_i satisfies (21) iff every cycle in the corresponding network flow problem has non-negative total cost (the proof of this statement is omitted for brevity - readers are referred to [32] for the details). In particular, $\hat{\gamma}_i$, the infimum of γ such that (21) is satisfied, is infinite iff there exists a cycle in M_i, driven **entirely** by inputs in $\overline{\mathcal{U}}$, and such that $e \neq 0$ for at least one state along the cycle. Thus, it suffices to verify that $\overline{M}_i$ satisfies (21) for some finite γ to ensure that $\hat{\gamma}_i < \infty$, from which we can deduce that γ_i is finite by Proposition 6. □

7 Further Properties of the Construction

In this Section, we prove one additional property of the given construct: Intuitively, we show that if a deterministic finite state machine exists that can accurately predict the sensor output of a plant after some initial transient, then our construct recovers it. While the resulting DFM generated by our construct is not expected to be minimal (due to the inherent redundancy in this description, see the discussion in Section 5.1), this property suggests that our construct is well-suited for addressing analytical questions about convergence of the approximate models to the original plant.

Theorem 3. *Consider a plant P as in (7), a performance objective as in (2), a positive definite choice of $\mu_\Delta : \mathcal{W} \to \mathbb{R}_+$, and a sequence $\{M_i\}$ constructed following the procedure given in Section 5.2, with $\{\gamma_i\}$ denoting the gains of the corresponding approximation errors $\{\Delta_i\}$. Assume there exists a deterministic finite state machine M with fixed initial condition, such that the Δ resulting from the interconnection of P and M as shown in Figure 2 has gain $\gamma = 0$. Then $\gamma_{i^*} = 0$ for some index i^*. Moreover, if $\{M_i\}$ is output nested, $\gamma_i = 0$ for all $i \geq i^*$.*

Proof. Assume a DFM M with the stated properties exists, and let $w(t)$ be the output of the system Δ constructed by interconnecting P and M as shown in Figure 2. By assumption, we have

$$\inf_{T \geq 0} \sum_{t=0}^{T} 0.\rho_\Delta(u(t)) - \mu_\Delta(w(t)) > -\infty \Leftrightarrow \sup_{T \geq 0} \sum_{t=0}^{T} \mu_\Delta(w(t)) < \infty$$

Since $\mathcal{W}$ is finite, the cardinality of $\mu_\Delta(\mathcal{W})$ is also finite, as is that of the state set of M. Thus there must exists a time T^* such that $\mu_\Delta(w(t)) = 0$ for all $t \geq T^*$, or equivalently $w(t) = 0$ for all $t \geq T^*$ (by the positive definiteness of μ_Δ). Now let $i^* = T^*$, and consider the corresponding DFM M_{i^*} in the constructed sequence. We claim that $|Y(q)| = 1$ for every $q \in \mathcal{Q}_{i^*,F}$. The proof is by contradiction: Indeed, suppose that $|Y(q)| > 1$ for some $q = (y_1, \ldots, y_{i^*}, u_1, \ldots, u_{i^*})' \in \mathcal{Q}_{i^*,F}$. Thus, there exists an input sequence, namely $u(0) = u_1$, $u(1) = u_2, \ldots$, $u(T^* - 1) = u_{i^*}$ with two corresponding feasible sensor outputs of P given by $y(0) = y_1$, $y(1) = y_2, \ldots$, $y(T^* - 1) = y_{i^*}$, $y(T^*) = y'$ and $y(0) = y_1$, $y(1) = y_2, \ldots$, $y(T^* - 1) = y_{i^*}$, $y(T^*) = y''$ where $y' \neq y''$. Since M has fixed initial condition, its response to the input sequence is fixed, and it thus follows that $w(T^*) \neq 0$ for some run, contradicting the fact that $w(t) = 0$ for all $t \geq T^*$. This cannot be, and hence $|Y(q)| = 1$ for all $q \in \mathcal{Q}_{i^*,F}$. It follows from this and Proposition 2 that $y_{i^*}(t) = y(t)$ for every $t \geq T^*$, and thus $\gamma_{i^*} = 0$. When $\{M_i\}$ is output nested, we can immediately conclude from the above and Lemma 4 that $\gamma_i = 0$ for all $i \geq i^*$. □

8 Conclusions and Future Work

In this paper, we revisited the recently proposed notion of ρ/μ approximation. We proposed a general procedure for constructing a sequence of finite state machines for systems over finite alphabets that are not subject to exogenous inputs. We showed that the resulting constructs satisfy the three required properties of ρ/μ approximations. We also showed that they exhibit a 'completeness' property, in the sense that if a finite state machine exists that can perfectly predict the sensor output after some transient, then our construct recovers it. Finally, we showed that the cardinality of the minimal disturbance alphabet that can be used in this setting equals that of the sensor output alphabet.

Future work will focus on two directions:

1. At the theoretical level, it is clear from the construct that the problem of approximation and that of state estimation under coarse sensing are closely intertwined. We will thus focus on understanding the limitations of approximating certain classes of systems by these approximations, or at a more basic level, the limitations of reconstructing the state under coarse sensing.
2. At the algorithmic level, the work will focus on improving the efficiency both at the implementation level as well as the algorithmic development level. In particular, we will look into refining this procedure by developing a recursive version.

9 Acknowledgments

This research was supported by NSF CAREER award 0954601 and AFOSR Young Investigator award FA9550-11-1-0118.

References

[1] R. Alur, T. Henzinger, G. Lafferriere, and G. Pappas, "Discrete abstractions of hybrid systems," *Proceedings of the IEEE*, vol. 88, no. 2, pp. 971–984, 2000.

[2] C. Belta, A. Bicchi, M. Egerstedt, E. Frazzoli, E. Klavins, and G. J. Pappas, "Symbolic planning and control of robot motion: State of the art and grand challenges." *IEEE Robotics and Automation Magazine*, vol. 14, no. 1, pp. 61–70, March 2007.

[3] A. Chutinan and B. H. Krogh, "Computing approximating automata for a class of hybrid systems," *Mathematical and Computer Modelling of Dynamical Systems*, vol. 6, no. 1, pp. 30–50, 2000.

[4] ——, "Verification of infinite-state dynamic systems using approximate quotient transition systems," *IEEE Transactions on Automatic Control*, vol. 46, no. 9, pp. 1401–1410, 2001.

[5] J. E. R. Cury, B. H. Krogh, and T. Niinomi, "Synthesis of supervisory controllers for hybrid systems based on approximating automata," *IEEE Transactions on Automatic Control*, vol. 43, no. 4, pp. 564–568, 1998.

[6] T. T. Georgiou and M. C. Smith, "Robustness analysis of nonlinear feedback systems: An input-output approach," *IEEE Transactions on Automatic Control*, vol. 42, no. 9, pp. 1200–1221, September 1997.

[7] A. Girard and G. J. Pappas, "Approximation metrics for discrete and continuous systems," *IEEE Transactions on Automatic Control*, vol. 52, no. 5, pp. 782–798, 2007.

[8] M. Kloetzer and C. Belta, "A fully automated framework for control of linear systems from temporal logic specifications," *IEEE Transactions on Automatic Control*, vol. 53, no. 1, pp. 287–297, February 2008.

[9] K. Kobayashi, J. Imura, and K. Hiraishi, "Stabilization of finite automata with application to hybrid systems control," *Discrete Event Dynamic Systems*, vol. 21, no. 4, pp. 519–545, 2011.

[10] E. A. Lee, "Cyber physical systems: Design challenges," University of California, Berkeley, Tech. Rep. No. UCB/EECS-2008-8, January 2008.

[11] L. Ljung, *System Identification: Theory for the User*, 2nd ed., ser. Information and System Sciences. Prentice Hall, 1999.

[12] J. Lunze, "Qualitative modeling of linear dynamical systems with quantized state measurements," *Automatica*, vol. 30, pp. 417–431, 1994.

[13] J. Lunze, B. Nixdorf, and J. Schröder, "Deterministic discrete-event representation of continuous-variable systems," *Automatica*, vol. 35, pp. 395–406, March 1999.

[14] A. S. Matveev and A. V. Savkin, *Qualitative Theory of Hybrid Dynamical Systems.* Boston: Birkhäuser, 2000.

[15] R. Milner, *Communication and Concurrency*, ser. International Series in Computer Science. Upper Saddle River, NJ: Prentice Hall, 1989.

[16] T. Moor and J. Raisch, "Supervisory control of hybrid systems whithin a behavioral framework," *Systems & Control Letters, Special Issue on Hybrid Control Systems*, vol. 38, pp. 157–166, 1999.

[17] T. Moor, J. Raisch, and S. D. O'Young, "Discrete supervisory control of hybrid systems by l-complete approximations," *Discrete Event Dynamic Systems: Theory and Applications*, vol. 12, pp. 83–107, 2002.

[18] D. Park, "Concurrency and automata on infinite sequences," in *Proceedings of the Fifth GI Conference on Theoretical Computer Science*, ser. Lecture Notes in Computer Science. Springer-Verlag, 1981, no. 104, pp. 167–183.

[19] G. Pola, A. Girard, and P. Tabuada, "Approximately bisimilar symbolic models for nonlinear control systems," *Automatica*, vol. 44, no. 10, pp. 2508–2516, October 2008.

[20] J. Raisch and S. D. O'Young, "Discrete approximation and supervisory control of continuous systems," *IEEE Transactions on Automatic Control*, vol. 43, no. 4, pp. 569–573, April 1998.

[21] P. J. Ramadge and W. M. Wonham, "Supervisory control of a class of discrete event processes," *SIAM Journal on Control and Optimization*, vol. 25, no. 1, pp. 206–230, 1987.

[22] ——, "The control of discrete event systems," *Proceedings of the IEEE*, vol. 77, no. 1, pp. 81–98, January 1989.

[23] P. Tabuada, "An approximate simulation approach to symbolic control," *IEEE Transactions on Automatic Control*, vol. 53, no. 6, pp. 1406–1418, July 2008.

[24] ——, *Verification and Control of Hybrid Systems: A Symbolic Approach.* Springer, 2009.

[25] P. Tabuada, A. Ames, A. A. Julius, and G. J. Pappas, "Approximate reduction of dynamical systems," *Systems & Control Letters*, vol. 57, no. 7, pp. 538–545, 2008.

[26] D. C. Tarraf, "Constructing ρ/μ approximations for systems with no exogeneous input," in *Proceedings of the* 51^{st} *IEEE Conference on Decision and Control*, December 2012, pp. 6102–6106.

[27] ——, "Constructing ρ/μ approximations from input/output snapshots for systems over finite alphabets," in *Proceedings of the* 50^{th} *Allerton Conference on Communication, Control and Computing*, October 2012.

[28] ——, "A control-oriented notion of finite state approximation," *IEEE Transactions on Automatic Control*, vol. 56, no. 12, pp. 3197–3202, December 2012.

[29] D. C. Tarraf, M. A. Dahleh, and A. Megretski, "Stability of deterministic finite state machines," in *Proceedings of the American Control Conference*, June 2005, pp. 3932–3936.

[30] D. C. Tarraf and L. A. Duffaut Espinosa, “On finite memory approximations constructed from input/output snapshots,” in *Proceedings of the 50th IEEE Conference on Decision & Control and the European Control Conference*, Orlando, Fl, December 2011, pp. 3966–3973.

[31] D. C. Tarraf, A. Megretski, and M. A. Dahleh, “Finite state controllers for stabilizing switched systems with binary sensors,” in *Hybrid Systems: Computation and Control*, ser. Lecture Notes in Computer Science, G. Buttazzo, A. Bicchi, and A. Bemporad, Eds. Springer-Verlag, April 2007, vol. 4416, pp. 543–557.

[32] ——, “A framework for robust stability of systems over finite alphabets,” *IEEE Transactions on Automatic Control*, vol. 53, no. 5, pp. 1133–1146, June 2008.

[33] ——, “Finite approximations of switched homogeneous systems for controller synthesis,” *IEEE Transactions on Automatic Control*, vol. 56, no. 5, pp. 1140–1145, May 2011.

[34] A. Tiwari and G. Khanna, “Series of abstractions for hybrid automata,” in *Hybrid Systems: Computation and Control*, ser. Lecture Notes in Computer Science. Springer, 2002, vol. 2289.

[35] J. C. Willems, “The behavioral approach to open and interconnected systems,” *IEEE Control Systems Magazine*, vol. 27, pp. 46–99, 27 2007.

[36] B. Yordanov and C. Belta, “Formal analysis of discrete-time piecewise affine systems,” *IEEE Transactions on Automatic Control*, vol. 55, no. 12, pp. 2834–2840, 2010.